

WPC-215WAC-12th

12th Gen Intel® Alder Lake Core™
i3-1215U / i5-1235U / i7-1255U processor



Features

- Industrial-grade 21.5" FHD LCD panel with 50k backlight lifetime
- True-flat touchscreen with multi-touch projected capacitive control
- 12th Gen Intel® Alder Lake Core™ i3 / i5 / i7 processor
- 2 x DDR5 SDRAM, max.64GB, 1 x M.2 2280, NVMe or SATA SSD
- SP13 I/O ports: 2 x LAN / 2 x USB / 1 x COM
- Full device IP66/IP69K with Strong aluminum alloy casing
- Support TPM2.0 hardware security
- Wide Operating Temperature -20°C to 70°C
- 9V to 36V DC Wide Range Power Input, Supporting OVP / OCP / RPP



Specifications

System			
CPU	12th Gen Intel® Core™ i3-1215U	12th Gen Intel® Core™ i5-1235U	12th Gen Intel® Core™ i7-1255U
L2 Cache	10MB	12MB	12MB
TDP	15W	15W	15W
Graphics	Intel® UHD Graphics	Intel® Iris® Xe Graphics	Intel® Iris® Xe Graphics
System Chipset	Integrated With Intel® SoC		
Memory	2 x DDR5 4800 MHz 8GB, Up to 64GB		
Harddisk	1 x M.2 120G SSD (250G / 500G / 2TB SSD) / 1 x 2.5" SATA		
Network	Intel® 226-V GbE LAN		
Audio	Realtek ALC897 Audio controller		
TPM	TPM 2.0		
Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset		
Operation System	Windows 10 / 11, Linux, Ubuntu		
I / O			
VIDEO	1 x H-DMI (Optional)		
Ethernet	2 x SP13 Waterproof Giga LAN RJ45 Connector		
USB	2 x SP13 Waterproof Connector For USB2.0		
COM	1 x SP13 Waterproof Connector For COM		
Wireless Network	Optional (WiFi / Bluetooth / 4G / 5G)		
Other I/O Interface	1 x Power Switch		
Expansion			
M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)		
	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		
	1*M.2 (Key-M, 2280, NVMe/ SATA, SSD)		
SIM Socket	1x SIM Socket		
Display			
LCD Size	21.5" (16:9)		
Resolution	1920 x 1080 (FHD)		
Brightness (cd/m²)	400 cd/m2		
Contrast Ratio	1000:1		
Backlight MTBF	50000 hrs		
Viewing Angle	89 / 89 / 89 / 89 (CR≥10) (L / R / U / D)		
Touch screen			
Touch Type	10 point PCAP		
Surface Hardness	≥7H		

We reserve the right to change specifications and product descriptions at any time without prior notice.

Power	
Power Input	1 x SP13 Waterproof Connector For 9V~36V DC
Power Mode	Support AT, ATX Mode
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) RPP (Reverse Polarity Protection)
Power Consumption	≤45W
Physical	
Material	Aluminum Alloy Shell
Mounting	Stand / Wall / VESA
Dimension (W x H x D)	536 x 328 x 45 mm
Packing Size	630 x 180 x 470 mm
Weight (Net)	7.9 KG
Environment	
Operating Temperature	-20~70°C (-4~158°F)
Storage Temperature	-30~80°C (-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Protection	1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
IP Level	IP66 / IP69K
EMC	CE, FCC, Class A, ROHS

Dimension & I/O

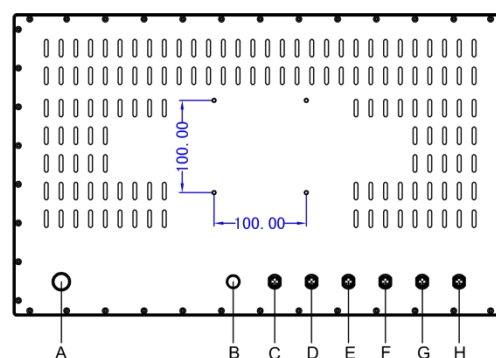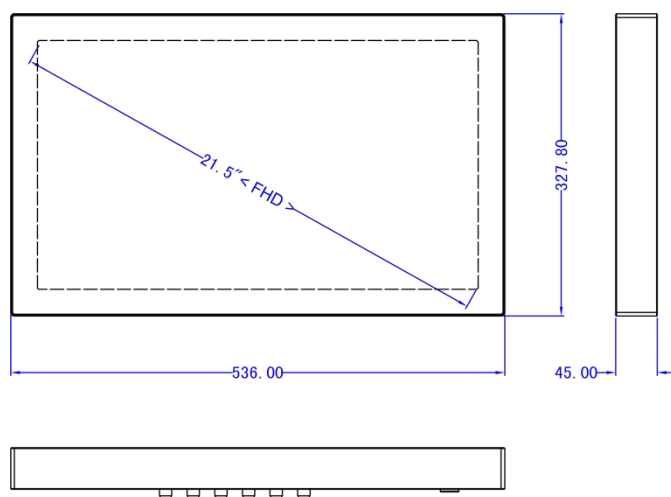

I / O Definition:

A: Power Button	B: Breather Valve
C: COM (optional)	D: USB (optional)
E: USB (optional)	F: LAN (optional)
G: LAN (optional)	H: DC 9V~36V

Product Dimensions: 536 x 327.8 x 45 mm (21.1 x 12.9 x 1.77 in)

Ordering info

Available models	Description
WPC-3215WAC	Fanless Waterproof Industrial PC 12th Gen Intel® Alder Lake Core™ i3-1215U 1.2GHz Processor With Capacitive touch
WPC-5215WAC	Fanless Waterproof Industrial PC 12th Gen Intel® Alder Lake Core™ i5-1235U 1.3GHz Processor With Capacitive touch
WPC-7215WAC	Fanless Waterproof Industrial PC 12th Gen Intel® Alder Lake Core™ i7-1255U 1.7GHz Processor With Capacitive touch

Packing list

1 x Standard product
1 x 60W PSU (Power Supply)
2 x SP13 Waterproof USB Cable 2M
1 x SP13 Waterproof COM Cable 2M
2 x SP13 Waterproof LAN Cable 2M
1 x CD-ROM

E-Mail: qiyun@qytpc.com **URL:** <http://www.qytpc.com>

TEL: +85-755-86534866 | 1st Bld, Xiangxiang Industrial Park, Shiyan Subdistrict, Shenzhen, China



**ТЕРРИТОРИЯ
АВТОМАТИЗАЦИИ**

РБ, Минск, ул. Шафарнянская 11, вход 13
Tel: +375 (17) 356-0990, +375 (17) 356-0995
info@t-automation.by | www.t-automation.by